




BINARY INPUT WORD			THERMOMETER-CODED SIGNALS						
D3	D2	D1	<i>T7</i>	T6	T5	T4	ТЗ	T2	T1
0	0	0	0	0	0	0	0	0	0
0	0	1	0	0	0	0	0	0	1
0	1	0	0	0	0	0	0	1	1
0	1	1	0	0	0	0	1	1	1
1	0	0	0	0	0	1	1	1	1
1	0	1	0	0	1	1	1	1	1
1	1	0	0	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1

Fig.2

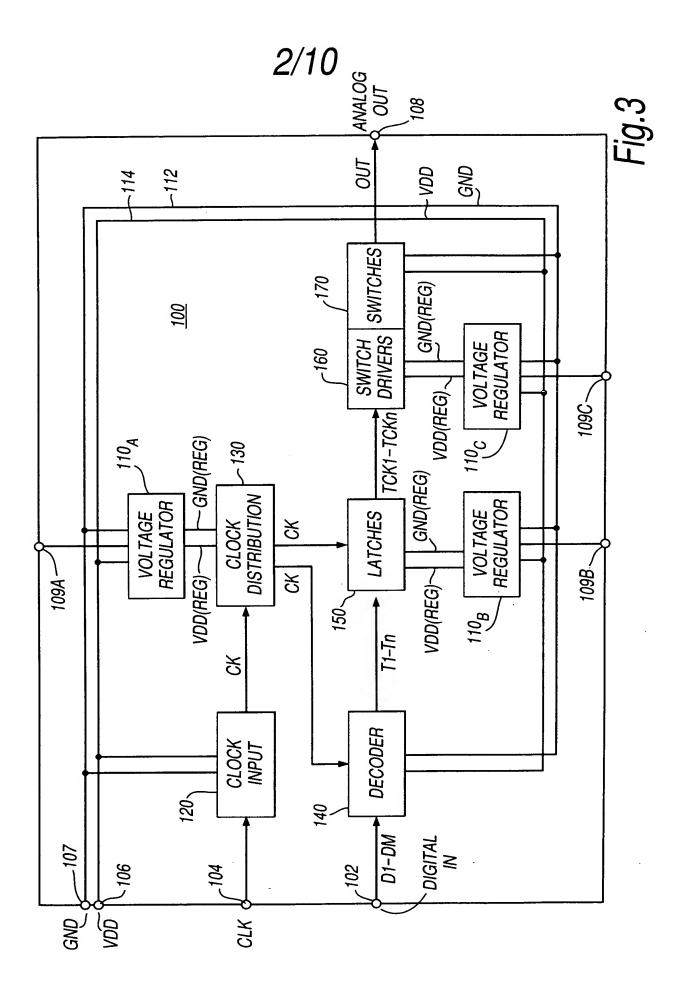


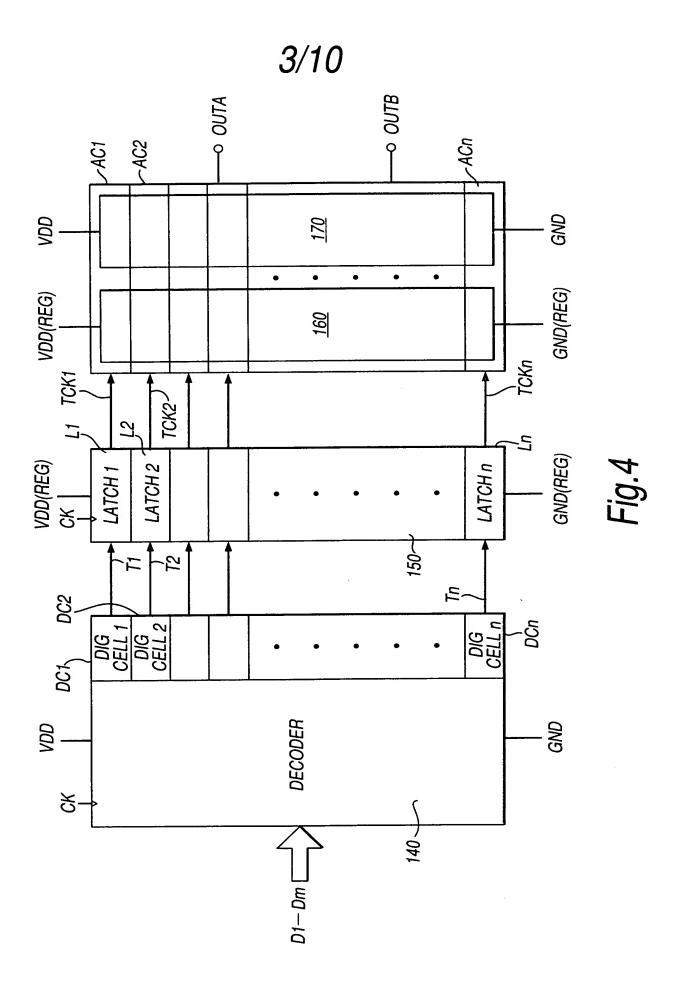

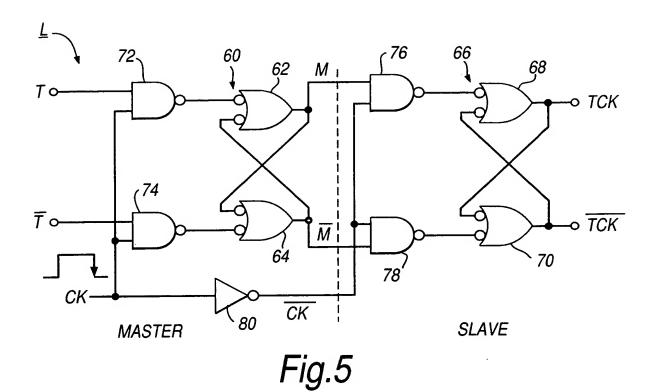

VDD <u>AC</u> 90 92 VDD(REG) VDD(REG) CN TCK o H S1 SW1 OFF SW2 ON 95<sub>1</sub> OUTA OUTB

Fig.6

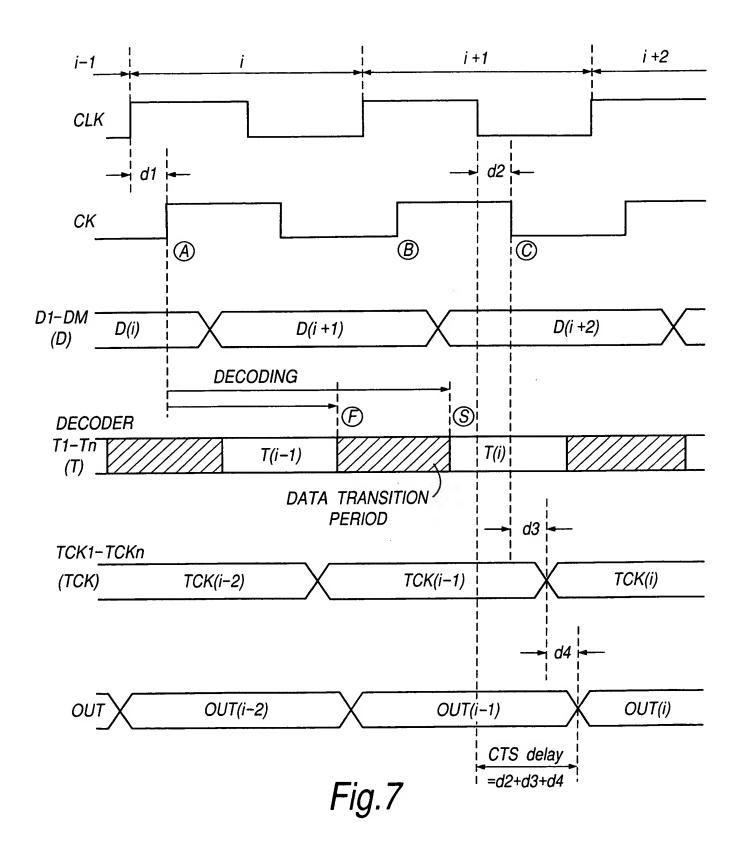

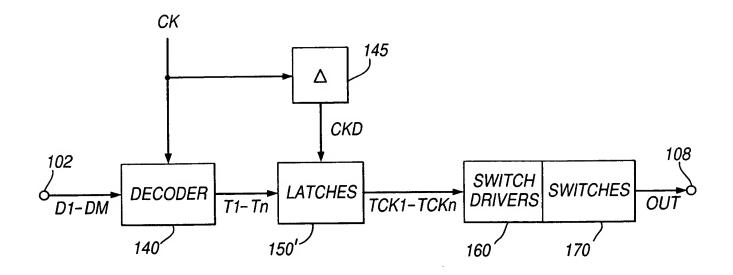


Fig.8A

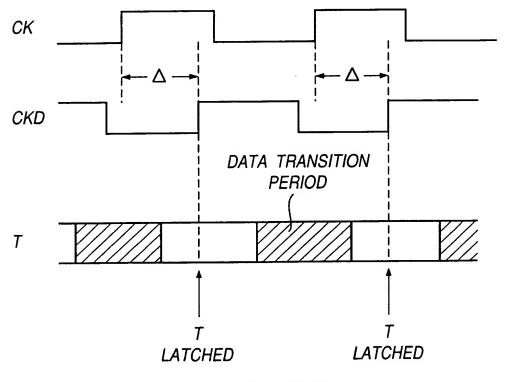
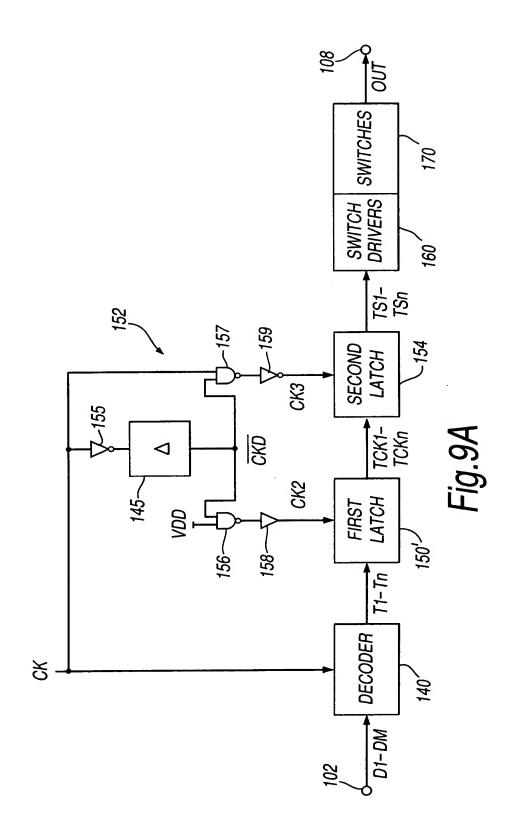
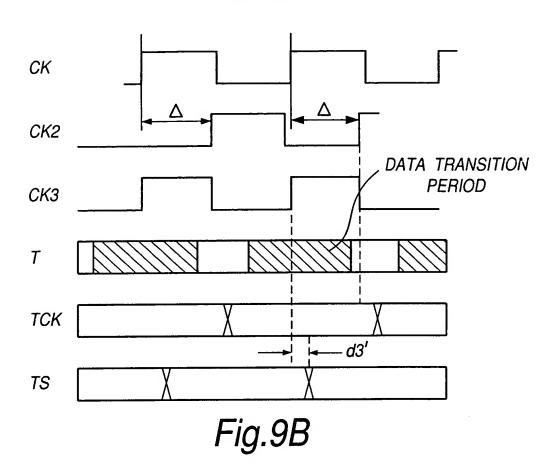
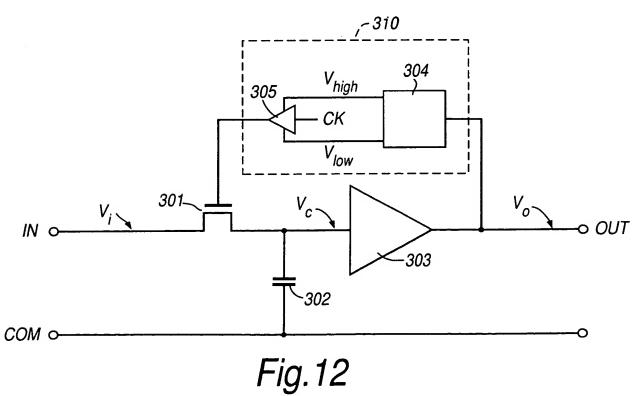



Fig.8B









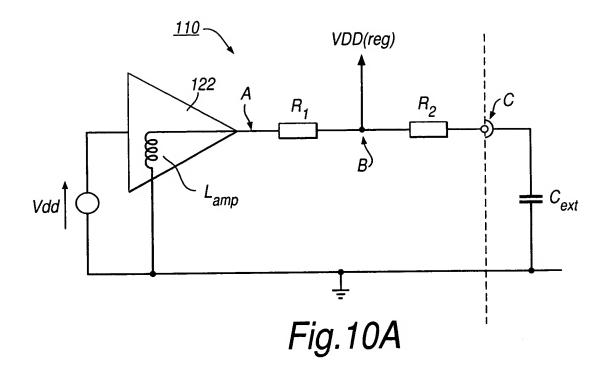




Fig.10B

